

Local Possession Authority – ANWT302

Multiple worksites

If the LPA includes more than one worksite, each worksite must have a Protection Officer. Protection Officers are responsible to the Possession Protection Officer.

Worksites must be protected by red flags/red lights and three railway track signals or STOP signs/red lights placed at least 500m from the worksite on both sides.

If worksites are less than 500m apart, they may be treated as one worksite or as separate worksites.

Where separate worksites are established within 500m of each other:

- the multiple worksite area must have a nominated Coordinating Protection Officer to coordinate the multiple worksite area,
- each worksite must have a Protection Officer, and must comply with the Coordinating Protection Officer's instructions, and
- a worksite delineation marker must be clamped to the rail midway between worksites, and
- protection of red flags/red lights and three railway track signals or STOP signs/red lights must be placed at least 500m from the outermost worksites.

If worksites are more than 500m but less than 1000m apart:

- three railway track signals must be placed midway between the worksites, and
- a red flag/red light must be placed next to the middle railway track signal, or
- place a STOP sign/red light midway between the worksites.

Using a Local Possession Authority – ANPR 700


Worksite delineation marker must be two vertical yellow lights that clamp to the rail.

6. Treat worksites less than 500m apart as one worksite or as separate worksites.

Where separate worksites are established within 500m of each other:


- o a Coordinating Protection Officer must be nominated to coordinate the multiple worksite area, and
- o a worksite delineation marker must be clamped to the rail midway between worksites, and
- o the worksite delineation marker must indicate the contact details of the Protection Officers, and
- o place protection of red flags/red lights and three railway track signals or STOP signs/red lights at least 500m from the outermost worksites.

Figure ANPR 700-4

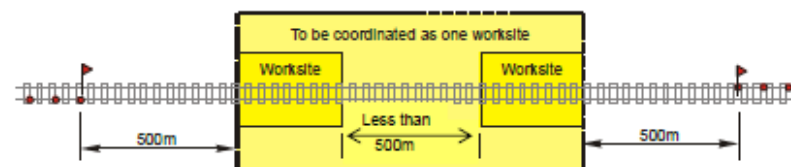


Example of protection arrangements for combined multiple worksites

Figure ANPR 700-4A

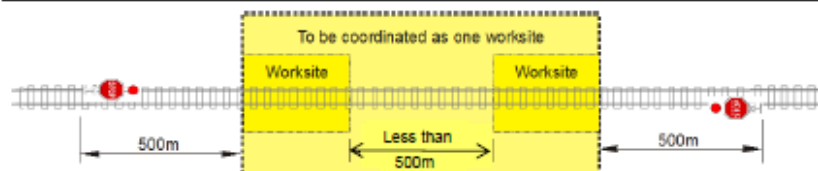


Example of protection arrangements for combined multiple worksites using STOP signs/red lights

Figure ANPR 700-5

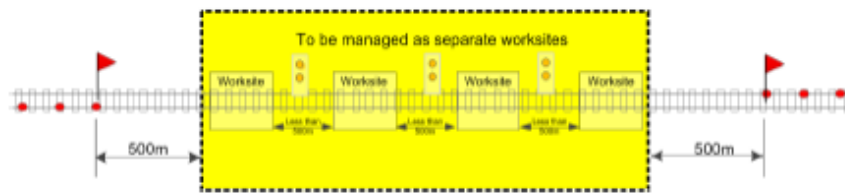

Example of protection arrangements for multiple worksites within 500m of each other

Figure ANPR 700-5A

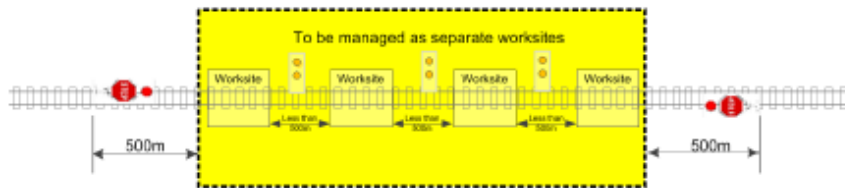

Example of protection arrangements for multiple worksites within 500m of each other using STOP signs/red lights